

LED WORK LIGHT

IP65

FP-55R-L SERIES

without plug.

LED driver is built in the lamp head

Low voltage power AC/DC 24V with 1.8 meters of cord without plug. Also, special voltage can be specified.

Feature

- Various lighting angles to select 25°, 60° and 80°. Standard lighting angle is 60°.
- Power of each LED bulb is 2W x 6 pcs.
- Reinforced lense for high crack-resistance.
- Well prevention for explosion, dust, coolant and lubricant.
- Long service life up to 40,000 lighting hours.
- Suitable for temperature range -30° ~ +50°.
- Free of infrared ray and ultraviolet ray radiation.




• FP-55RS-L

• FP-55RM-L

• FP-55RL-L

OPTION

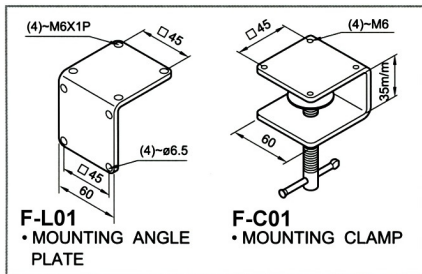

DIMENSION DRAWINGS

Unit:mm

